


Perfil MS 41/21/1,5

Carga admissível com aplicação de carga centralizada

L	41/21/1,5
[cm]	[N]
20	2205
40	1101
60	732
80	547
100	390
120	268
140	194
160	145
180	111
200	87
220	68
240	54
260	43
280	33
300	26

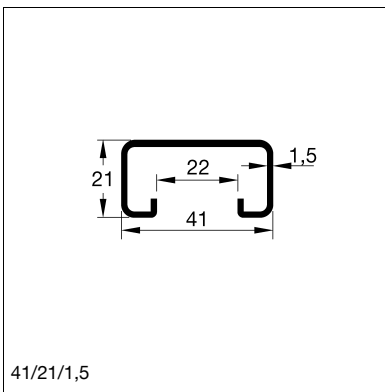

Cálculos de acordo com RAL GZ-655-C

$\sigma_{zul} \leq 185 \text{ N/mm}^2$
 $f \leq L/200$

